




The future of vision

AJL pro+

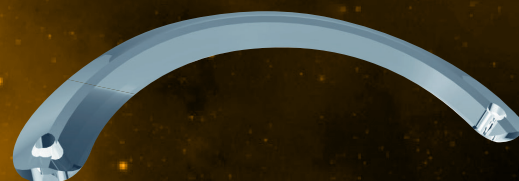

AJL pro+

Asymmetric intrastromal corneal ring

Reference	CW (clockwise/optical area of 5) y CW6 (clockwise/optical area of 6) CCW (counterclockwise/optical area of 5) y CCW6 (counterclockwise/optical area of 6)
Brand name	AJL pro+
Definition	Asymmetric intrastromal corneal rings.
Arc	160° and 210°
Thickness	Progressive variable thickness from 0.15 to 0.25 mm. and 0.15 to 0.30 mm.
Indications	The correct indication of rings AJL pro+ requires a detailed evaluation of the topographic conditions and pachymetry of the cornea, in addition to a complete visual examination. • Asymmetric keratoconus. • Post-Lasik corneal ectasias.
Product description	The AJL pro + ring offers an asymmetric design in base thickness and width, allowing the surgeon to choose the most suitable ring for each patient based on the patient's keratometry values and the area where the ring is to be implanted. AJL pro + rings feature two types of progressions, both in base width (600-800 µm) and in thickness (150-250 µm / 150-300 µm), with the designs available both clockwise and counterclockwise.
Material	Polymethyl Methacrylate (PMMA) with natural filter for blue light.
Sterilization method	Ethylene Oxide (ETO).
Supply	Individual sterile segment, non-pyrogenic.
Shelf-life	4.5 years.

* Product with CE marking


REV: 00. 07/2020

Reference table for orders

AJL pro+

ASYMMETRIC RING OPTICAL AREA OF 5 MM.

Optical area	Thickness	Width	Arc
CW25160	0.15-0.25 mm.	0.60-0.80 mm.	160°
CCW25160	0.15-0.25 mm.	0.60-0.80 mm.	160°
CW30160	0.15-0.30 mm.	0.60-0.80 mm.	160°
CCW30160	0.15-0.30 mm.	0.60-0.80 mm.	160°
CW25210	0.15-0.25 mm.	0.60-0.80 mm.	210°
CCW25210	0.15-0.25 mm.	0.60-0.80 mm.	210°
CW30210	0.15-0.30 mm.	0.60-0.80 mm.	210°
CCW30210	0.15-0.30 mm.	0.60-0.80 mm.	210°

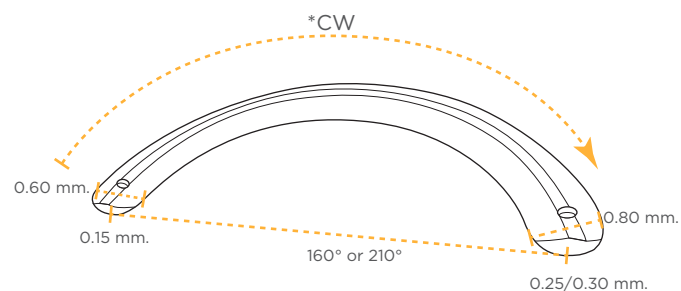

ASYMMETRIC RING OPTICAL AREA OF 6 MM.

Optical area	Thickness	Width	Arc
CW625160	0.15-0.25 mm.	0.60-0.80 mm.	160°
CCW625160	0.15-0.25 mm.	0.60-0.80 mm.	160°
CW630160	0.15-0.30 mm.	0.60-0.80 mm.	160°
CCW630160	0.15-0.30 mm.	0.60-0.80 mm.	160°
CW625210	0.15-0.25 mm.	0.60-0.80 mm.	210°
CCW625210	0.15-0.25 mm.	0.60-0.80 mm.	210°
CW630210	0.15-0.30 mm.	0.60-0.80 mm.	210°
CCW630210	0.15-0.30 mm.	0.60-0.80 mm.	210°

